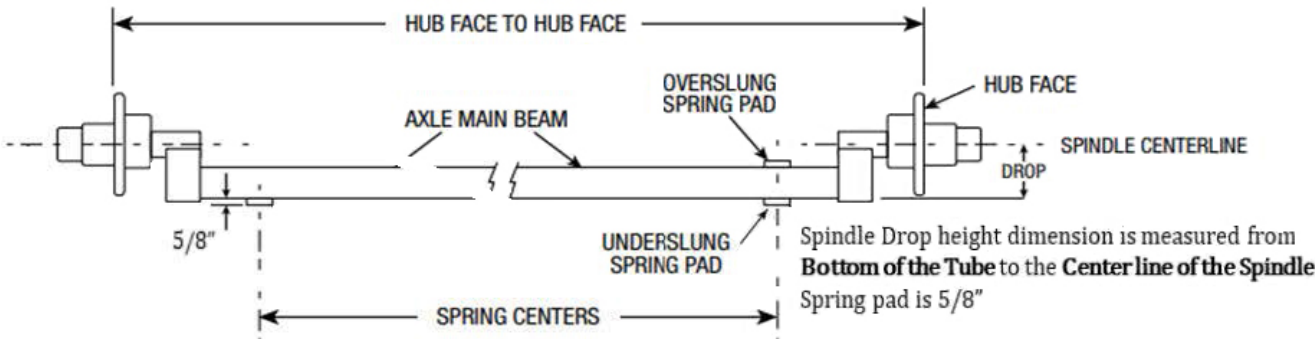


MARINE TRAILER AXLE ORDER GUIDE - SPRUNG

QR-211

MARINE AXLES

Customer Name		Customer Part Number																		
																				
Model & Bolt Pattern	2,000 lb (545)		2,500 lb (545)		3,500 lb (545)															
	4,200 lb (545)		5,200 lb (655)		6,000 lb (655)															
					7,000 lb (865)															
	Hub Face		Spring Center																	
Axle Capacity																				
Spindle Options Drop spindle height in increments of 1/8"			Axle Option Full Axle Beam w/Spindle Only End Unit Only (Spindle & Hub Assy.)																	
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;"></th> <th style="width: 35%;">Straight</th> <th style="width: 35%;">Drop Height</th> </tr> </thead> <tbody> <tr> <td>2,000 - 2,500 lbs</td> <td></td> <td>N/A</td> </tr> <tr> <td>3,500 - 3,750 lbs</td> <td></td> <td></td> </tr> <tr> <td>4,200 lbs</td> <td></td> <td></td> </tr> <tr> <td>5,200 - 7,000 lbs</td> <td></td> <td>N/A</td> </tr> </tbody> </table>				Straight	Drop Height	2,000 - 2,500 lbs		N/A	3,500 - 3,750 lbs			4,200 lbs			5,200 - 7,000 lbs		N/A	Brake/Idler Options Idler Idler 2K - Black Disc Idler 2K - Silver ° Parking Feature		
	Straight	Drop Height																		
2,000 - 2,500 lbs		N/A																		
3,500 - 3,750 lbs																				
4,200 lbs																				
5,200 - 7,000 lbs		N/A																		
Beam Options 2"X2" Tube 2"X3" Tube (Up to 4.2K) Straight w/Camber Straight w/o Camber (Not Recommended)		Spring Orientation Underlung Overslung																		
Beam Coating Options Raw Galvanized PC Black		Spring Type Installed Double Eye DBL Slipper No Springs Installed No Spring Pads																		
		Spring Length (Eye to Eye, No Load) 20" 23" 25" Other (Specify)																		
Lubricant Shield (Excludes 2K/2.5K Rate) GRS Protector/Zerk in Cap Super Lube/Zerk (Excludes 4.2K Rate)		Caliper Options Aluminum/Red Cast Zinc		Banjo Fitting Options Single Port Dual Port																
				0° 45° UP 45° Down																
				Bleeder Yes No																