


MARINE TRAILER AXLE ORDER GUIDE - TORSION

MARINE AXLES

Customer Name _____ **Customer Part Number** _____

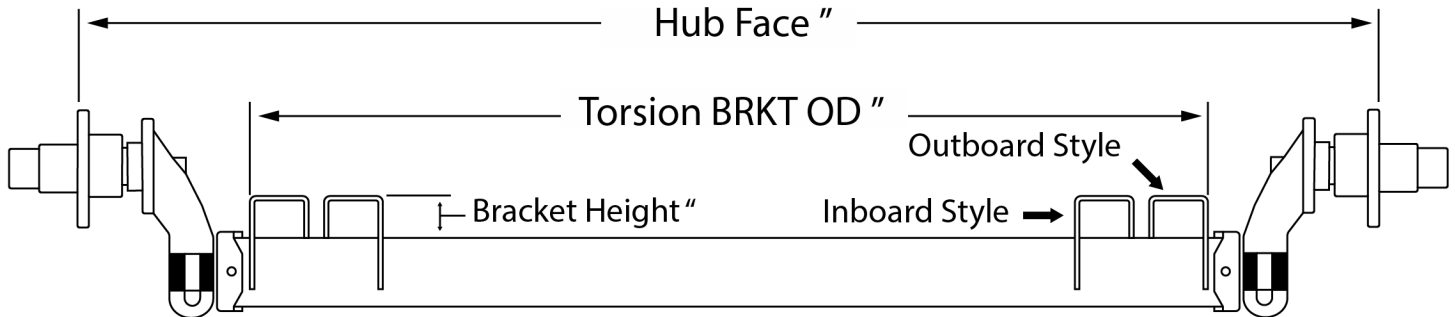

Model & Bolt Pattern	1,500 lb (545)	2,000 lb (545)	2,500 lb (545)	3,500 lb (545)
	3,750 lb (545)	4,200 lb (545)	6,000 lb (655)	7,000 lb (865)
	Hub Face		Outside of Bracket	

Axle Capacity

Bracket Options				Axle Option	
	Type	Outboard (OB)	Inboard (IB)	Full Axle	Beam Only
Flush Double (FF)		N/A	N/A	End Unit Only (Spindle & Hub Assy.)	
Short Single, 1.8" (SS)					
Tall Double, 2.0" (RF)		N/A	N/A		
Tall Single, 4.6" (ST)					
Flush 5.35" Wide (FFF)		N/A	N/A		

Brake/Idler Options	
Idler	
Disc	
° Parking Feature	

Side Mount (Up to 4.2K) No Yes (Raw) Yes (Primer)

<p>Beam Options</p> <p>Straight V-Bend</p> <p>Straight w/o Camber (Not Recommended)</p> <p>Beam Coating Options</p> <p>Raw Galvanized</p> <p>PC Black</p>	<p>Torsion Arm Options</p> <p>Attached</p> <p>° Start Angle ° (Specify) Up Down</p> <p>Ship Loose</p> <p>Spindle torsion arms set at 6° increments above or below axle center line.</p> <p>NOTE: Ride will suffer when start angle is more than 18° above axle center line, or more than 42° degrees below axle center line.</p>
---	--

<p>Lubricant</p> <p>Shield</p> <p>GRS Protector/Zerk in Cap</p> <p>Super Lube/Zerk</p> <p>(Excludes 4.2K Rate)</p>	<p>Caliper Options</p> <p>Aluminum/Red</p> <p>Cast Zinc</p>	Banjo Fitting Options	
		Single Port	Dual Port
		0°	45° UP 45° Down
	Bleeder	Yes	No