


AXLES

Customer Name			Customer Part Number							Beam Only	
Max. Capacity	2K	3.5K	5.2K	6K	7K	8K	8K HYB	10K	12K		
Lubrication Type (if grs)	Solid Cap Standard			Super Lube/Zerk							
Fluid Type	Oil			Grease							
Axle Type	Brake			Idler							
Brake Type	Electric			Disc	Hydraulic	Electric, Self Adjust			Electric, Self Adjust ABS		
Camber	Yes			No (Not Recommended)							
Tube Type	Std. Square			Diamond (Up to 7K)							
Angle Position	Upturn (-)			Downturn (+)							
Angle	0°			10°D	22.5°D	32°D	45°D	10°U		22.5°U	
Hub Face Dimension											
Brkts. Dim.	Outside	Inside									
Bolt Pattern	Brake			475	545	550	555	655	865		
	Idler			440	475	545 (2K - 5.5")		545 (2K/4.4K - 6.5")		550 555 655 865	
Stud Size	1/2"			5/8"	9/16"						
Bracket Style	Low Profile			High Profile			3" High Profile (Up to 5.2K)				
Bracket Orientation	Inboard/STD			Outboard/REV							
Side Mount Brackets Installed	Yes (Steel)			Yes (Aluminum)			No				
Wiring (Prewire is Extra)	Yes			No							
Tube Coating	Powder Coat Black			Raw			Galvanized				

Torsion Axle Info

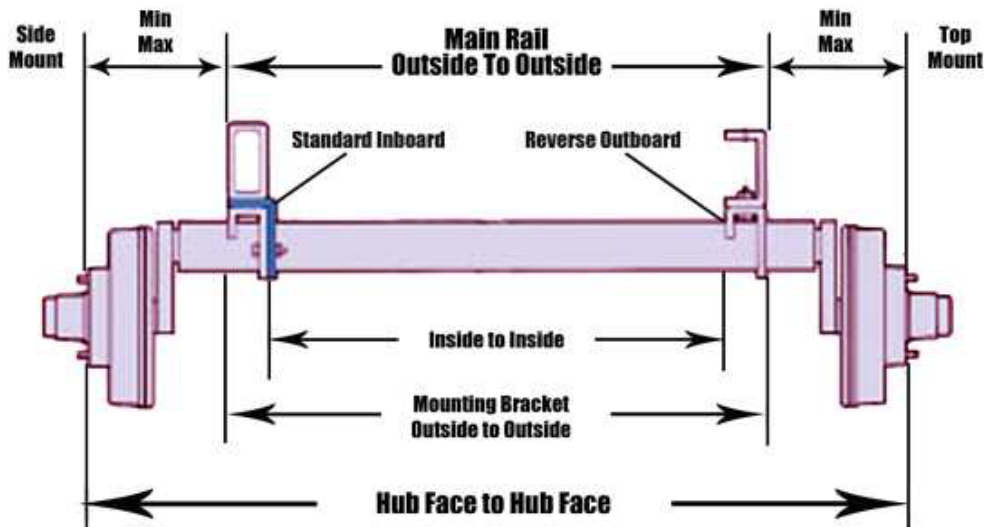

Please Check Box That Represents Bracket Direction

Standard Inboard ☐
Reverse Outboard ☐